Certified Land Corner Restoration Perpetuation and Filing Record

Land Survey Division
Arkansas Agriculture Department
11701 I-30 Suite 323
Little Rock, Arkansas 72209
TELEPHONE: 501-683-1666

CIRCUIT CLERK'S FILING RECORD:

- [x] ORIGINAL CORNER (original or perpetuated original corner / Type A & B)
- [ ] RE-ESTABLISHED CORNER (by statutory method / Type C)
- [ ] EXISTING MONUMENT OR PAROL EVIDENCE (Type C)

CORNER DESCRIPTION	SECTION	TOWNSHIP	RANGE	COUNTY
SW	03	17S	10W	Bradley

DESCRIPTION OF ORIGINAL CORNER: (ORIGINAL & PERPETUATING SURVEYS)

On November 4, 1843, Deputy Surveyor John R. Conway set a post corner to Sections 3, 4, 9, & 10 from which he marked:

1. Pine 16"	N42°E	36 links	(23.76')
2. Pine 16"	S36°W	44 links	(29.04')
3. Black Oak 16"	S30°E	35 links	(23.10')
4. Pine 36"	N55°W	73 links	(48.18')

On February 19, 1940, D. Guice, Bradley Lumber Co. Surveyor, noted:
Old corner to Sec. 3, 4, 9, & 10 set by C.T. Beard on Oct. 4, 1916.

1. O.B.T. stump hole	N42°E	36 links	(23.76')
4. O.B.T. stump hole	N55°W	73 links	(48.18')
5. C.T.B. O.B.T. Post Oak 12"	S41°15'E	13½ links	(8.91')
6. C.T.B. O.B.T. Red Oak stump	N3°W	27 links	(17.82')

and marked four trees:

7. Blackgum 9"	N2°15'E	93 links	(61.38')
8. Blackgum 6"	S82°45'E	54 links	(35.64')
9. Pine 14"	S24°30'W	68 links	(44.88')
10. Pine 12"	N85°30'W	83 links	(54.78')

On October 4, 1916, C.T. Beard, Bradley Lumber Co. Surveyor, noted:

1. Stump hole	Checks for N.E. O.B.T.		
3. O.B.T.	Standing		
4. Stump hole	Checks for N.W. O.B.T.		

and marked two trees with an "X":

5. Post Oak 12"	S41°15'E	13½ links	(8.91')
6. Red Oak 24"	N3°W	27 links	(17.82')

On November 21, 1960, D. Guice, Bradley Lumber Co. Surveyor, noted:
Brass-top corner to Sec. 3, 4, 9, & 10 set on Oct. 4, 1916 and reset on Feb. 19, 1940.

5. C.T.B. O.B.T	Post Oak stump	S41°15'E	13½ links	(8.91')
7. D.G. O.B.T.	Blackgum 9"	N2°15'E	93 links	(61.38')
9. D.G. O.B.T.	Pine 14"	S24°30'W	68 links	(44.88')
10. D.G. O.B.T.	Pine stump	N85°30'W	83 links	(54.78')

and marked two trees:

11. Forked Pine 10"	N21°15'W	19 links	(12.54')
12. Pine 18"	S52°E	37½ links	(24.75')

DESCRIPTION OF EVIDENCE FOUND:

May 27, 2009 - I found a 4" iron pipe with 5" brass cap. From this location:

1.	Stump hole.	N42°E	23.8'	7.	Dead snag.	N2°15'E	61.4' Red mule head blaze @ 4'.
2.	No evidence.			8.	Stump hole.	S82°45'E	35.6'
3.	No evidence.			9.	Stump hole.	S24°30'W	44.9'
4.	No evidence.			10.	No evidence.		
5.	Stump remnants.	S41°15'E	8.9'	11.	Stump hole.	N21°15'W	12.5'
6.	No evidence.			12.	Pine stump.	S52°E	24.8'
				13.	Pine 13"	N41°15'E	5.0' Red mule head blaze @ 4', yellow painted "X", & butt blaze.
				14.	Pine 18"	S44°W	25.9' Red mule head blaze @ 4', yellow painted "X", & aluminum location tag.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE LOCATION OF THIS CORNER:

May 27, 2009 - I perpetuated the existing monument with the following:
Witness Accessories (NOTE: All distances are measured from the monument to the center of tree.)

13. Pine 13"	N41°15'E	5.0'	added:	4" orange band @ 6' above ground, butt blaze, BT tag, notched & inserted mag nail @ the base.
14. Pine 18"	S44°W	25.9'	added:	4" orange band @ 6' above ground, butt blaze, BT tag, notched & inserted mag nail @ the base.
15. Pine 11"	N88°30'E	15.3'	added:	4" orange band @ 6' above ground, butt blaze, BT tag, notched & inserted mag nail @ the base.
16. White Oak 12"	S50°30'E	28.7'	added:	4" orange band @ 6' above ground, butt blaze, BT tag, notched & inserted mag nail @ the base.

Cut "X" into tree numbers 13, 15, & 16 above.
Do Not Disturb sign on tree number 13 above.

REGISTERED PROFESSIONAL LAND SURVEYOR
STATE OF ARKANSAS
No. 1611
SIGNATURE
6/1/09
WESLEY D. FLETCHER

GEOGRAPHIC CORNER POSITION	Latitude	Longitude	Elevation (meters)	Datum	Positional Tolerance
	— — —	— — —			

POSITION DETERMINED BY:

I, Wesley D. Fletcher PLS # 1611 certify on this date 6/1/2009 that evidence was found for the corner described and I have established monuments and accessories to perpetuate the corner position as shown and sketched hereon.

LAND SURVEY DIVISION USE ONLY

DOCUMENT NUMBER: 017526

INDEX NUMBER: E13

I certify that this instrument was filed for record with the Land Survey Divsion on this date


7-6-09
Date

Everett Rowland, State Surveyor

(LSD FORM REVISED 01/11/2008)

03 SECTION | 17S TOWNSHIP | 10W RANGE

LOCATION SKETCH



O - INDICATES CORNER



Bearings determined by Suunto compass and adjusted for 1° East declination.

Section 4

Section 3

Section 9

Section 10

7. Dead snag.
N2°15'E – 61.4'

13. Pine 13"
N41°15'E – 5.0'

1. Stump hole.
N42°E – 23.8'

11. Stump hole.
N21°15'W – 12.5'

15. Pine 11"
N°88'30'E – 15.3'

8. Stump hole.
S82°45'E – 35.6'


5. Stump remnants.
S41°15'E – 8.9'

12. Pine stump.
S52°E – 24.8'

16. White Oak 12"
S50°30'E – 28.7'

14. Pine 18"
S44°W – 25.9'

9. Stump hole.
S24°30'W – 44.9'

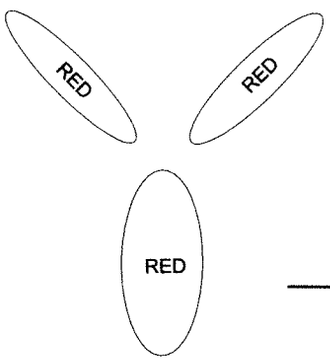


POTLACH MULE HEAD SKETCH


LEGEND

- 4" IRON PIPE with 5" BRASS CAP
- OTHER ACCESSORY
- BEARING TREE
- STUMP / STUMP HOLE / CLAYROOT / DEPRESSION



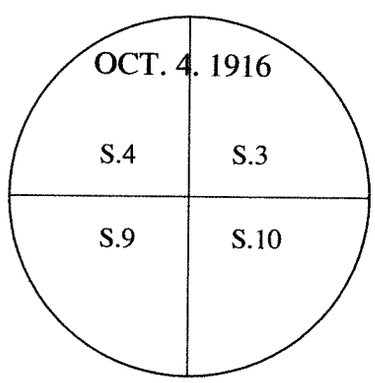

CAP SKETCH



GRAPHIC SCALE 1" = 20'