
STATE OF ARKANSAS
County of Columbia
Twp 18 S Rge 19 W Sec. 12



○ = Corner Location

I, Philip L. Stockwell, RLS 1341 certify that on the 6th day of June, 2002, found evidence of the SE corner of Section 12, Township 18 South, Range 19 West, of the Fifth Principal Meridian, and that I have established a new monument and accessories as described hereon to perpetuate the location of this corner and that the found evidence and restored monument and accessories are correctly shown.

IN WITNESS WHEREOF, I have hereunto set my hand and stamp this 10th day of June, 2002.

Philip L Stockwell
6-06-02

LSD 76-1

CERTIFIED LAND CORNER RESTORATION – PERPETUATION AND FILING RECORD

Doc. No. 13202
Film
Date
LSD office use only

Description of Original Corner

SET WOOD POST FROM WHICH:

1. BEACH 22 IN. DIA. N 48° W 72 LKS (47.52 FEET)
2. HOLLY 12 IN. DIA. S 50° W 27 LKS. (17.82 FEET)

Additional Accessories (marked in 1940)

ADDITIONAL ACCESSORIES (MARKED IN 1940)
3. RED OAK 20 IN. DIA. S 53°W 32.3 FEET
4. RED OAK 5 IN DIA. N 4° W 25.8 FEET
5. HICKORY 20 IN. DIA. S 88° E 58.4 FEET
6. 2 IN DIA. IRON PIPE AT CORNER TO SECTS. 1 & 12, T-18-S, R-19-W 5285 FEET (CHAINED IN 1940)
7. 2 IN DIA. IRON PIPE AT CORNER TO SECTS. 11,12,13, & 14 5355.88 FEET WEST (CHAINED IN 1940)

Description of Corner Evidence Found


1. CLAY ROOT FOUND IN 1940 IS NOW BARELY VISIBLE LOCATED AT N 47°30' W 48 FEET.
2. NO SIGN OF THE HOLLY REMAINS
3. FOUND DEFINITE STUMP HOLE AT S 53° W 34.3 FEET
4. FOUND STUMP HOLE (POSSIBLE RED OAK WITNESS) N 5°30' W 26.1 FEET (INCONCLUSIVE)
5. FOUND DEFINITE CLAY ROOT FOR LARGE TREE CENTER OF HOLE AT S 89° E 60.6 FEET
6. FOUND THE 2 IN DIA. IRON PIPE SET BY EBY IN 1940 VERIFIED BY STUMP HOLES AND DISTANCES TO NORTH AND WEST.
7. FOUND THE 2 IN DIA. IRON PIPE TO CORNER TO SECTS. 11,12,13, & 14 AT 5352.48 FEET (MEASURED)

JUN 21 2002

Point of the corner determined by: RECOVERED THE 2 IN DIA. IRON PIPE SET BY SAM EBY ON SURVEY OF 1940 WHICH HE NOTED WAS PLACED AT THE ORIGINAL LOCATION OF CORNER. HE RECOVERED A CLAY ROOT FOR BEECH TREE WITNESS. THE BEECH TREE WAS VERIFIED BY J.C. TALLEY AND B.A. HENDRICKS (SONS OF CIVIL WAR VETERANS AND ORIGINAL PATENT HOLDERS TO LAND) TO BE ORIGINAL BEARING TREE. ALL INFO. RECORDED IN 1940 FIELD NOTES.

Description of monument accessories I established to perpetuate the location of this corner.
1. SET 3" ALUMINUM MONUMENT (STAMPED AS SHOWN AT RIGHT) AT LOCATION OF 2 IN DIA. IRON PIPE FOUND. THE IRON PIPE WAS DRIVEN BESIDE THE MONUMENT AS GUARD FROM WHICH:
2. PLACED STEEL "T" WITNESS POST AND WARNING SIGN 0.60 FEET SOUTH.
3. WATER OAK 15 1/2 IN. DIA. BEARS S 89° W 17.15 FEET (PLACED GRID I.D. TAG THIS TREE)
4. S. GUM 13 IN. DIA. BEARS N 27° W 35.4 FEET (PLACED BEARING TREE TAG THIS TREE)
5. WATER OAK 7 IN. DIA. BEARS S 39°E 4.8 FEET (PLACED BEARING TREE TAG THIS TREE)
6. MAPLE 8 IN. DIA. BEARS N 29°E 9.5 FEET (PLACED BEARING TREE TAG THIS TREE)

SET 2" STEEL NAIL AT BASE OF TREE
SCRIBED "BT" IN BASE OF TREES
BANDED ALL TREES AND PAINTED ORANGE

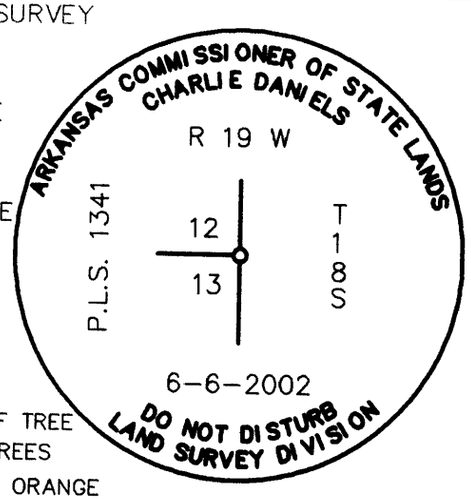

Field work executed by: Philip L. Stockwell, PLS 1341 & Christopher Long

OFFICE OF CLERK AND RECORDER: (Show filing data)
This document was filed for record on the 12 day of June, 2002, in Book 12 Page 61
Janice Lindsey by: Angela Bridges, D.C.
(Recorder)
at 12:55 p.m.
(Show or attach other information on reverse side)

I certify that this instrument was filed for record in the Land Survey Division on the 21 day of June 2002, and is truly recorded as Document 13202.

(State Surveyor)

Div. Ind. 125 Page 1 of 1 . Film Ind. _____