

36 SECTION | 7-S TOWNSHIP | 10-W RANGE




○ - INDICATES CORNER

LOCATION SKETCH

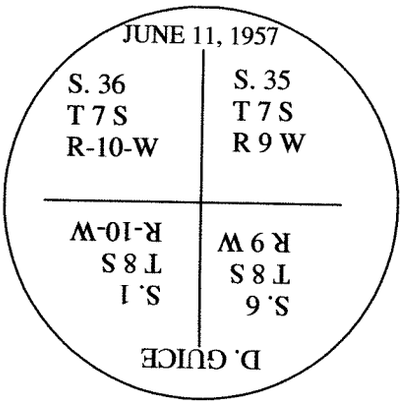

CAP SKETCH

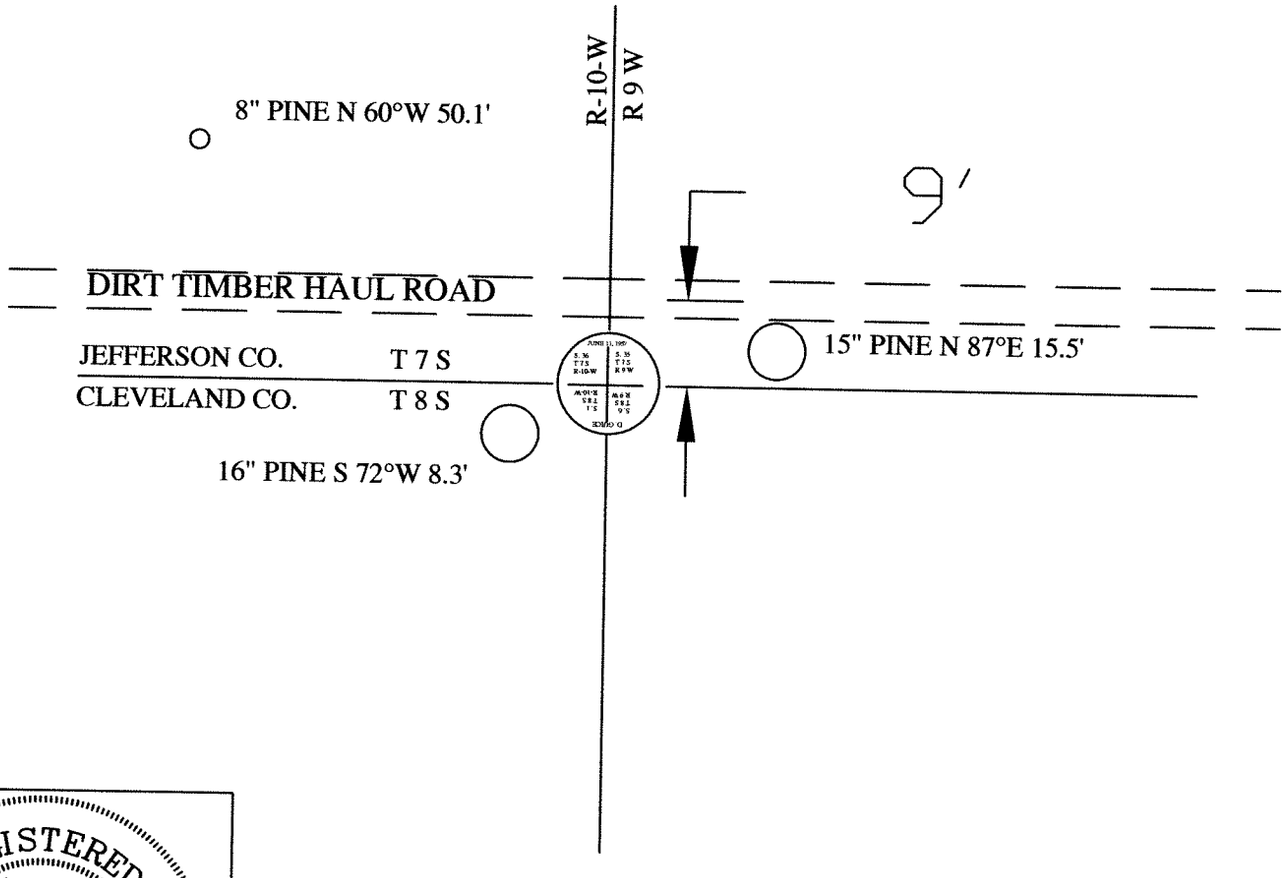

REGISTERED PROFESSIONAL LAND SURVEYOR
STATE OF ARKANSAS
NO. 1205
SIGNATURE
KELLY W. TAYLOR

Certified Land Corner Restoration Perpetuation and Filing Record

Land Survey Division
Arkansas Agriculture Department
11701 I-30 Suite 323
Little Rock, Arkansas 72209
TELEPHONE: 501-683-1666

CIRCUIT CLERK'S FILING RECORD:
OR, STATE LAND SURVEYORS OFFICE

INSTRUMENT NO._____

BOOK NO._____

PAGE NO._____

DATE:_____

☐ ORIGINAL CORNER (original or perpetuated original corner / Type A & B)
☐ RE-ESTABLISHED CORNER (by statutory method / Type C)
☒ EXISTING MONUMENT OR PAROL EVIDENCE (Type C)

CORNER DESCRIPTION	SECTION	TOWNSHIP	RANGE	COUNTY
SE COR.	36	7-S	10-W	JEFFERSON/ CLEVELAND LINE

DESCRIPTION OF ORIGINAL CORNER: (ORIGINAL & PERPETUATING SURVEYS)

SEE LAND SURVEY DOCUMENT NO. 15745 BY THOMAS L. STRODE, DATED NOVEMBER 5TH, 1977.

COULD NOT LOCATE ANY SUBSEQUENT SURVEYS

DESCRIPTION OF EVIDENCE FOUND:

FOUND MONUMENT AS DESCRIBED (DOC #15745) 10" BELOW NATURAL GROUND.
(3) 12" PINE N 50½ ° 38.2' - TREE UPROOTED
(4) 16" PINE S 22½ °E 76.0'- PINE STANDING NOW 22"
(5) 16" PINE S 13°W 45'- FOUND STUMP
(7) 6" R. O. N 12°E 6.4'- FALLS IN TIMBER HAUL ROAD NO EVIDENCE
(9) 8" PINE S 72°W 8.3'- PINE STANDING NOW 16"
(10) 8" PINE N 53½ ° 9.1'- FALLS IN ROAD NO EVIDENCE

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE LOCATION OF THIS CORNER:

(4) 22" PINE S 22½ °E 76.0'- ADDED BAND, BLAZED,NOTCHED AT BASE SET PK NAIL IN BASE, REPLACED TAG
(9) 16" PINE S 72°W 8.3'- ADDED BAND, BLAZED, NOTCHED AT BASE SET PK NAIL IN BASE, REPLACED TAG
(11) A 15" PINE BEARS N 87°E 15.5'- BANDED, BLAZED, NOTCHED AT BASE SET PK NAIL IN NOTCH, ADDED TAG
(12) A 8" PINE BEARS N 60°W 50.1'- BANDED, BLAZED, NOTCHED AT BASE SET PK NAIL IN NOTCH, ADDED TAG.
(ALL PAINTED RED)

REGISTERED PROFESSIONAL LAND SURVEYOR
STATE OF ARKANSAS
NO. 1205
SIGNATURE
KELLY W. TAYLOR

GEOGRAPHIC CORNER POSITION	Latitude	Longitude	Elevation (feet)	Datum	Positional Tolerance
	34 ° 03 ′ 48 ″	92 ° 03 ′ 33.5 ″	288'	NGVD 1929	+/- 50'

POSITION DETERMINED BY:
SCALED FROM QUAD MAP

I, KELLY W. TAYLOR PLS # 1205 certify on this date 06-23-2009

that evidence was found for the corner described and I have established monuments and accessories to perpetuate the corner position as shown and sketched hereon.

LAND SURVEY DIVISION USE ONLY

DOCUMENT NUMBER

017800

INDEX NUMBER

Z25

I certify that this instrument was filed for record with the Land Survey Divsion on this date

7-6-09
Date

Everett Rowland
Everett Rowland, State Surveyor