
CERTIFIED LAND CORNER RESTORATION - PERPETUATION AND FILING RECORD

S-1 2287

STATE OF ARKANSAS
County of Lincoln

Twp 8 S Rge 5 W Sec 1



O = Corner

I, Jimmie G. Craig
RLS 525 certify that on the 21st day of June, 1980, found evidence of the East Qtr corner of Sec. 1 Township 8 S, Range 5 W of the Fifth Principal Meridian, and that I have established a new monument and accessories as described hereon to perpetuate the location of this corner and that the found evidence and restored monument and accessories are correctly shown.

IN WITNESS WHEREOF, I have hereunto set my hand and stamp this 21st day of June, 1980.

JIMMIE G. CRAIG
REGISTERED
LAND SURVEYOR
STATE OF
ARKANSAS
NO. 525
Jim Craig
SIGNATURE


LSD 76-1

Description of Original Corner

On 22 August 1830, Dep. Surveyor N. Rightor "Set 1/4 section post from which a S. Gum 22" diameter bears S 17 W 5½ links and a Hackberry 10 inches diameter bears N 48 E @ 17 links distant. Land fit for cultivation & left lagoon.

Description of Corner Evidence Found

On June 14, 1980, I measured the GLO distance of 2640.0 ft South along the Range 4 & 5 West line from the Northeast corner of Section 1, T8S R5W. This point falls on the East shoulder of the Highway #114. There is no sign of any of the original witness trees--the entire area is within the right-of-way of the highway.

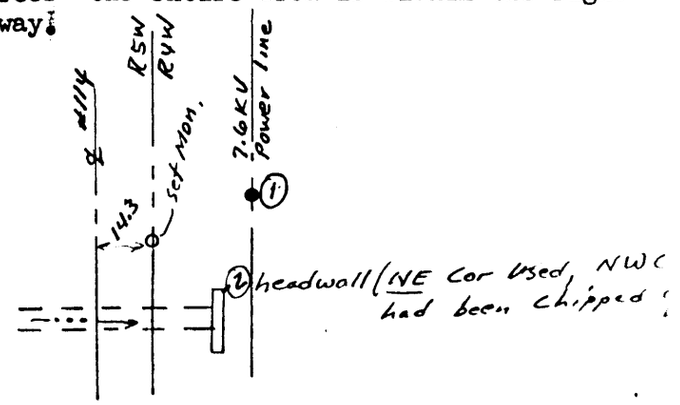

Point of the corner determined by: G L O distance.

Description of monument accessories I established to perpetuate the location of this corner. I set a standard A.G.C, L.S.D. aluminum cap in concrete approximately one foot east of the edge of the asphalt of Highway #114. I set a 3/4" iron pipe about 18" long in the concrete beneath the aluminum cap. The cap is embossed "Arkansas Geological Commission-Land Survey Division" and is stamped with 1/8" letters and numbers as shown in the circle to the right. The monument cap or top is set flush with the ground. The monument is 14.3 ft East of the centerline of the highway. ① A power lole bears N 80 E @ 29.8 ft and the ② Northeast corner of a concrete headwall bears S 20 E @ 8.0 ft.

1980
T8S
S 1 - S 6
R5W R4W
R L S 525

CHECKED

Field work executed by: Jimmie G. Craig & Jimmie L. ("BO") Craig

OFFICE OF CLERK AND RECORDER: (Show filing data)
This document was filed for record on the 22 day of June, 1980, in Book Page 32.

E C Breedin Jr (Recorder)
By Sara Breedin Jr

(Show or attach other information on reverse side)

I certify that this instrument was filed for record in the Land Survey Division on the 3rd day of July, 1980, and is truly recorded as Document 2287.

Rayford Hudson (State Surveyor)

Div. Ind 2287 Page 1 of 1. Film Ind.